



Line 700

gas ranges/with ovens

The top plate is made of stainless steel CrNi 18/10 class AISI 304 with thickness 1.5 mm. The base legs are made of stainless steel and are height adjustable. The whole unit complies with protection IP24. The unit 700 specifications include high performance, pressed tanks with round internal angles and ergonomic front panels with operating and control elements.



- top plate from stainless steel AISI 304 thickness 1.5 mm
- wide range of burners 3,5 - 8,5 kW
- model ranges SP and SPS with permanent flame
- in design with 2, 4 or 6 stoves or in combination with solid top
- oven GN 1/1, GN 2/1 or GN 3/1
- pressed oven chamber, circulating air in selected models
- water resistant control – prevents penetration of liquids in the cavities
- low rear chimney with cast iron grill



SPS 704 G



SPS 708 G



SPS 7012 G



SPS 740 G



SPS 780 G



SPS 7120 G



SPST 780/21 GE



SPST 780/21 G



SPST 7120/21 GE



SPST 7120/21 G




SPST 7120/31 GE




SPST 7120/31 G

Index	Model	mm	kg	V / Hz	kW	Burners	Oven kW / GN
117 260 100	SPS 704 G	400 x 730 x 300	26,7	-	12,5	1 x 4 + 1 x 8,5	-
117 260 104	SPS 708 G	800 x 730 x 300	49,2	-	29,5	1 x 4 + 3 x 8,5	-
117 260 439 117 260 439 117 260 518	SPS 7012 G SPS 7012A G SPS 7012B G	1200 x 730 x 300	74,9	-	42 42 46,5	2 x 4 + 4 x 8,5 2 x 4 + 4 x 8,5 1 x 4 + 5 x 8,5	-
117 260 146	SPS 740 G	400 x 730 x 900	38	-	12,5	1 x 4 + 1 x 8,5	-
117 260 147	SPS 780 G	800 x 730 x 900	65,5	-	29,5	1 x 4 + 3 x 8,5	-
117 260 440 117 260 515 117 260 519	SPS 7120 G SPS 7120A G SPS 7120B G	1200 x 730 x 900	102,7	-	42 42 46,5	2 x 4 + 4 x 8,5 2 x 4 + 4 x 8,5 1 x 4 + 5 x 8,5	-
117 260 124	SPST 780/21 GE	800 x 730 x 900	100,2	400 / 50-60	29,5 [G] ; 6,3 [E]	1 x 4 + 3 x 8,5	6,3 ; GN 2/1
117 260 115	SPST 780/21 G	800 x 730 x 900	111,2	-	35,5	1 x 4 + 3 x 8,5	6 ; GN 2/1
117 260 148	SPST 780/11 GE	800 x 730 x 900	92,4	230 / 50-60	29,5 [G] ; 3,13 [E]	1 x 4 + 3 x 8,5	3,13 ; GN 1/1
117 260 448 117 260 516 117 260 520	SPST 7120/21 GE SPST 7120A/21 GE SPST 7120B/21 GE	1200 x 730 x 900	136,7	400 / 50-60	42 [G];6,3 [E] 42 [G];6,3 [E] 46,5 [G];6,3 [E]	2 x 4 + 4 x 8,5 2 x 4 + 4 x 8,5 1 x 4 + 5 x 8,5	6,3 ; GN 2/1
117 260 459 117 260 517 117 260 521	SPST 7120/21 G SPST 7120A/21 G SPST 7120B/21 G	1200 x 730 x 900	147	-	48 48 52,5	2 x 4 + 4 x 8,5 2 x 4 + 4 x 8,5 1 x 4 + 5 x 8,5	6 ; GN 2/1
117 260 689	SPST 7120/31 GE	1200 x 730 x 900	150	400 / 50-60	42 [G];8,7 [E]	2 x 4 + 4 x 8,5	8,7 ; GN 3/1
117 260 691	SPST 7120/31 G	1200 x 730 x 900	162	-	52,5	2 x 4 + 4 x 8,5	10,5 ; GN 3/1


SPS 704 G

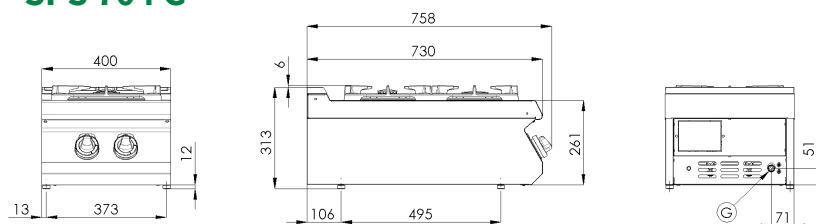


SPS 708 G

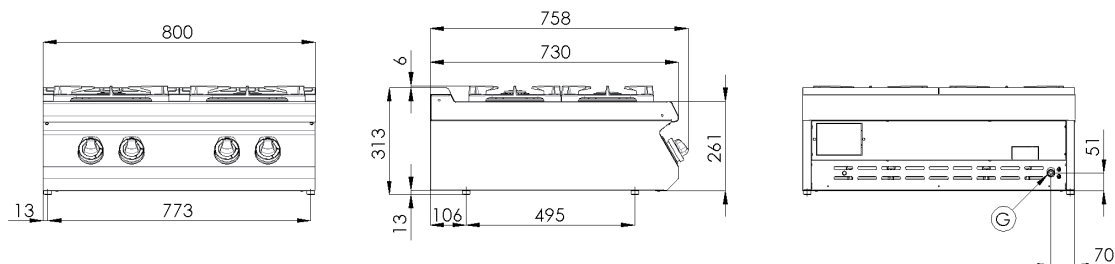

SPS 7012 G

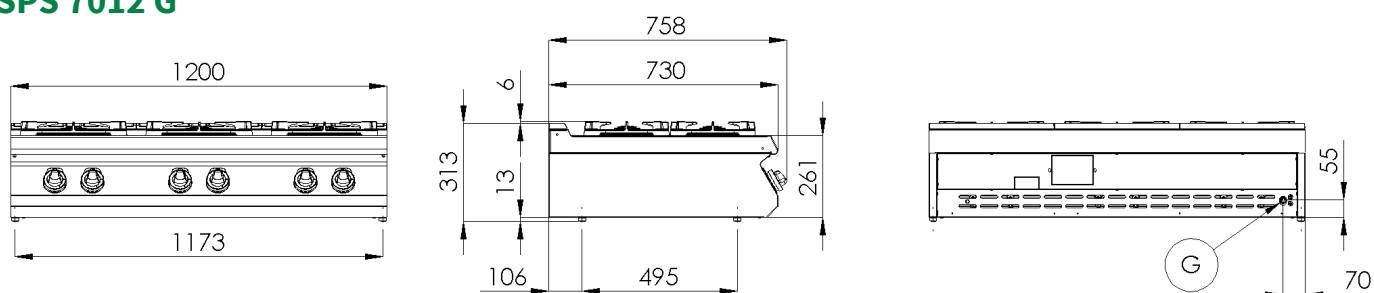


SPS 740 G

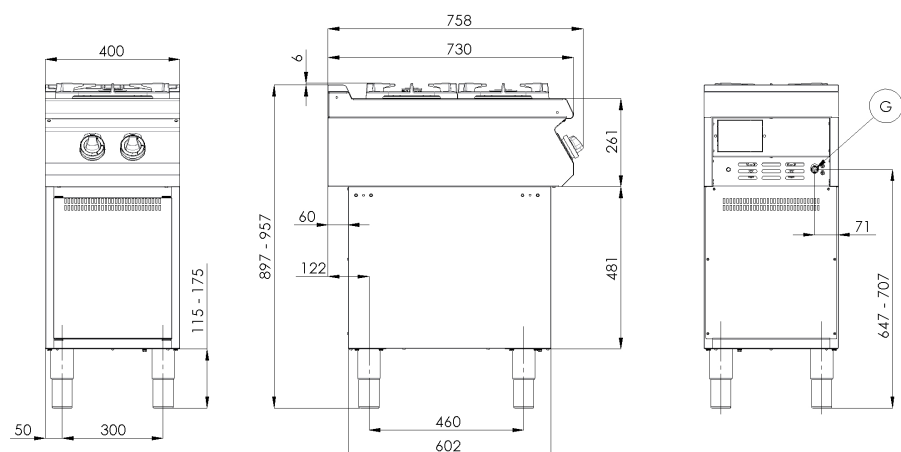


E – electric
G – gas


SPS 780 G

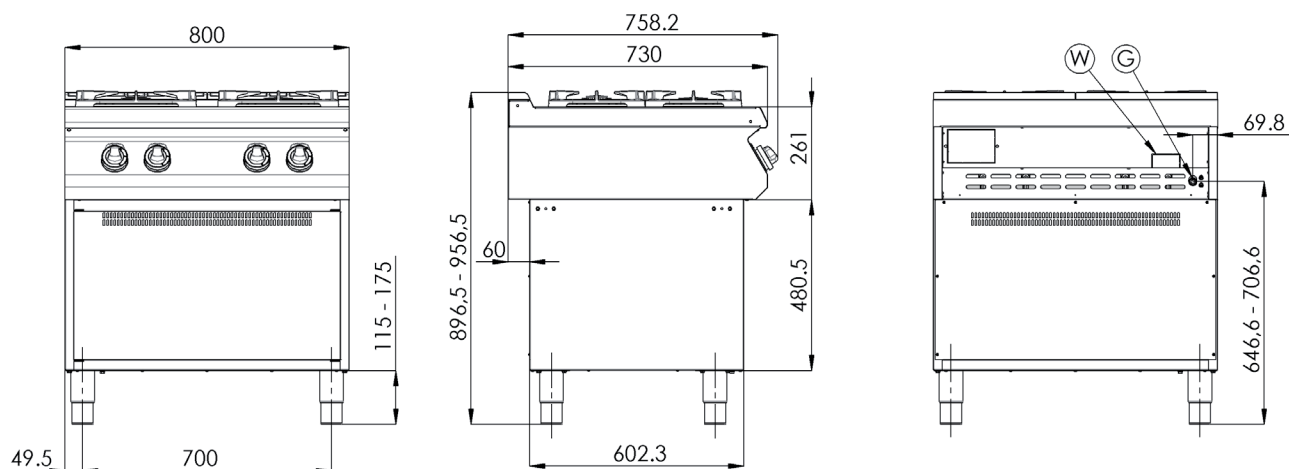

SPS 7120 G

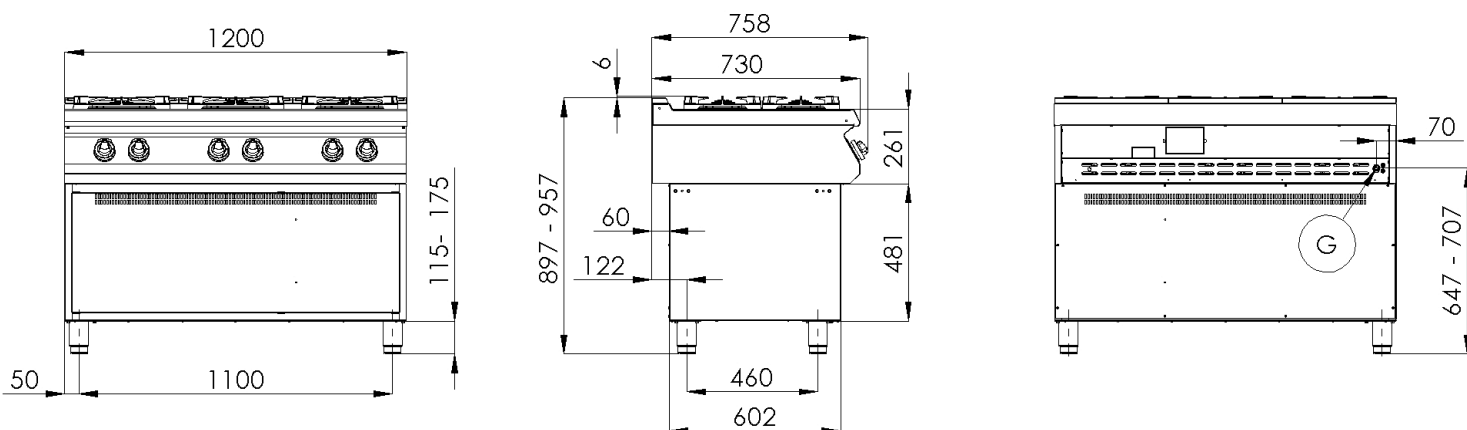


SPST 780 21 GE

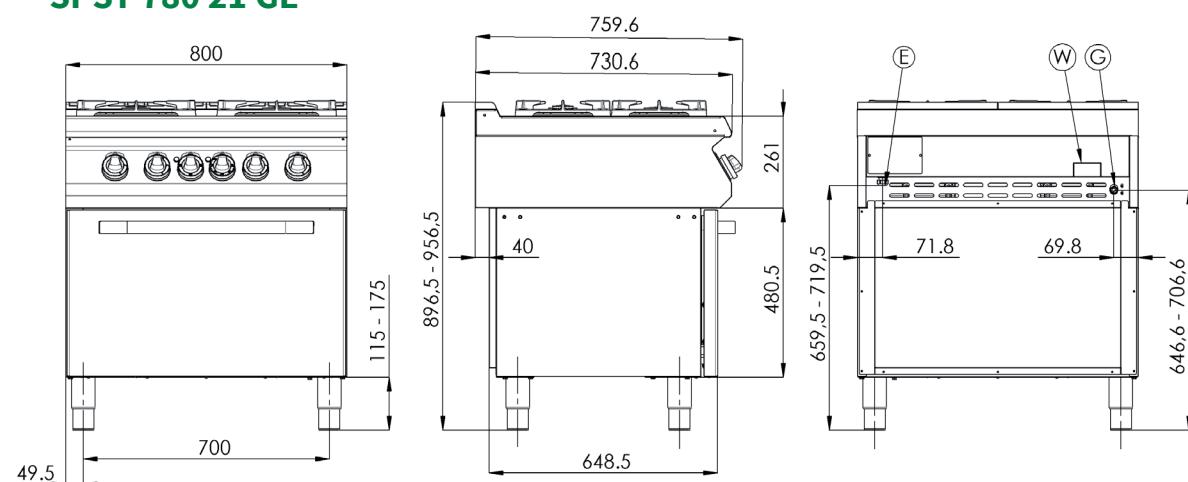


E - electric
G - gas


SPST 7120 21 GE

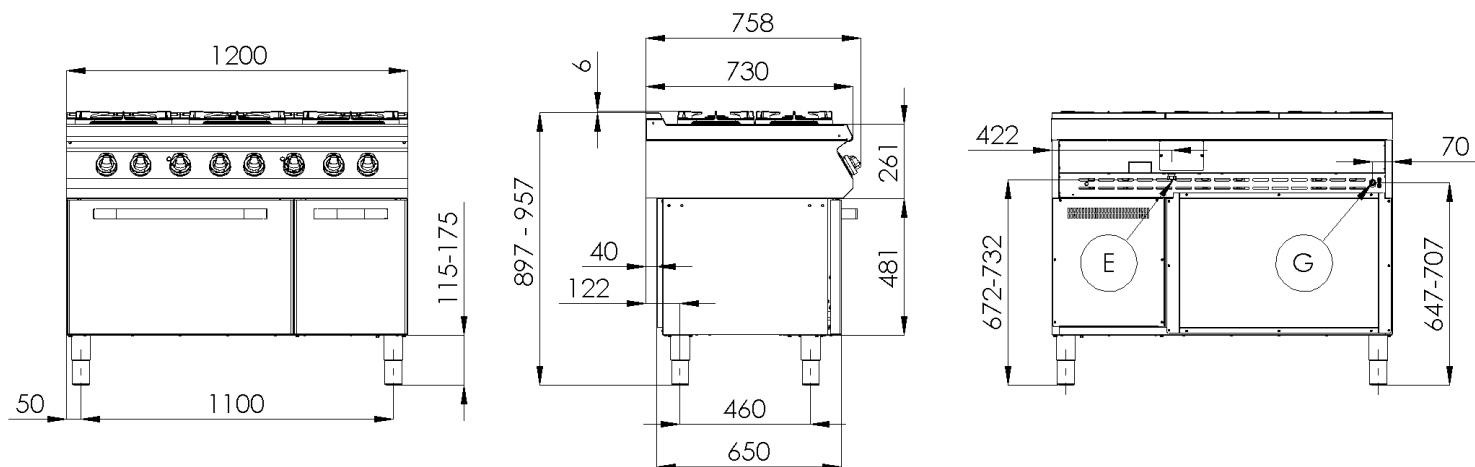

SPST 7120 31 GE

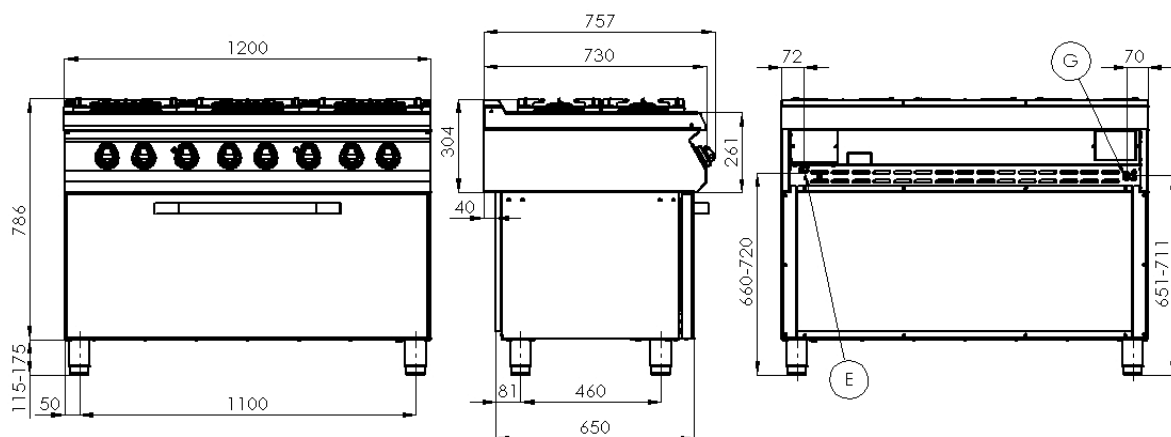

SPST 7120 31 G

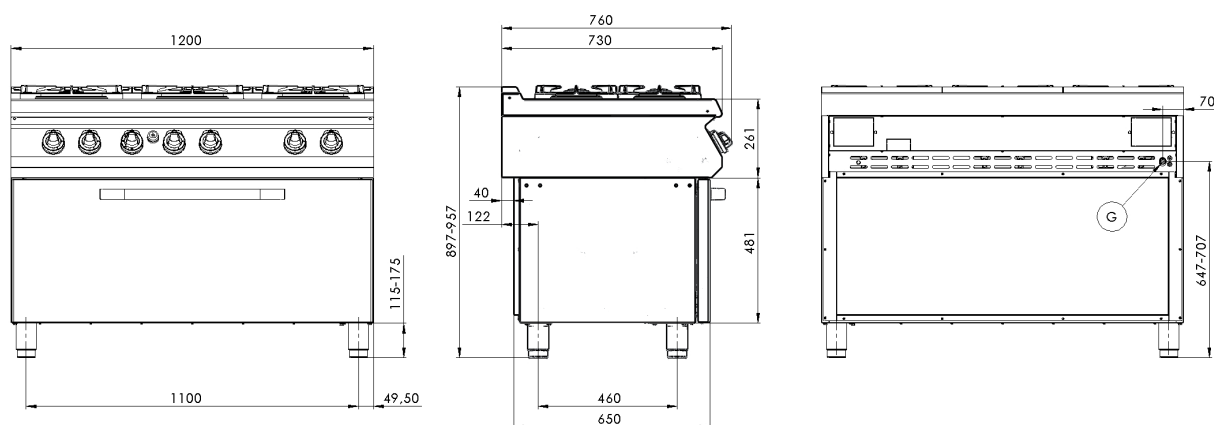

E – electric
G – gas