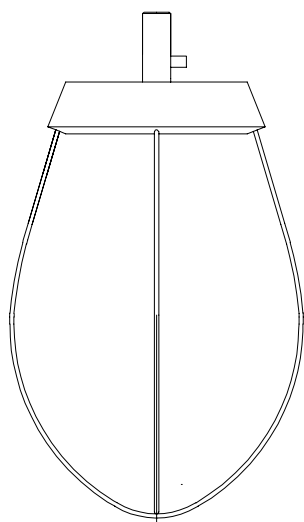
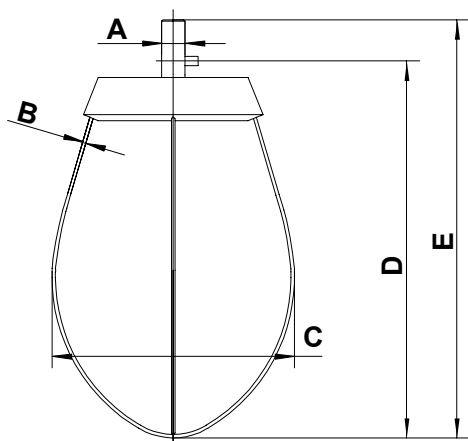


ORDRENUMRE SAMT MÅLSKITSER
ORDER NUMBERS AND DIMENSION SKETCHES
AUFTRAG NUMMERN UND MASSSKIZZEN



**RIS
WHIP
BESEN**

A/S WODSCHOW & CO. Denmark

**TYPE 1**

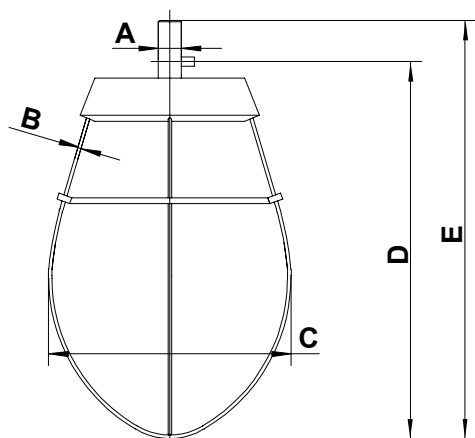
standard

TYPE 1-1

m. tykke tråde
w. thick wires
m. dicken Drähten

TYPE 1-2

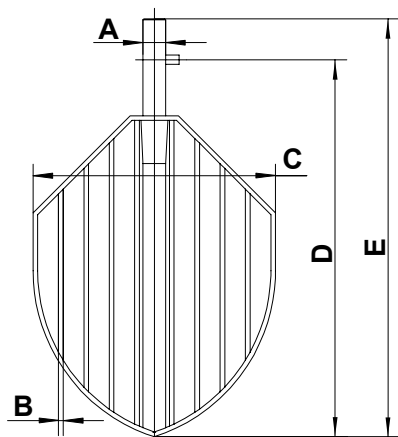
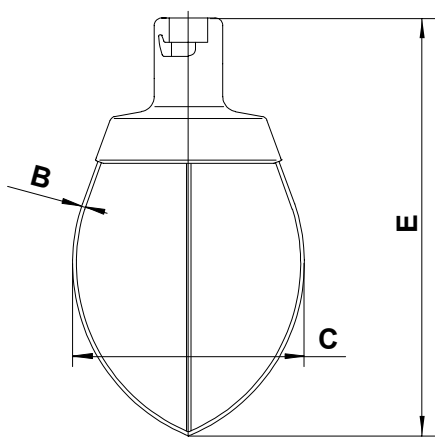
m. tynde tråde
w. thin wires
m. dünnen Drähten

**TYPE 2**

forstærket
reinforced
verstärkt

TYPE 2-1

dobbelt forstærket
double reinforced
doppel verstärkt

**TYPE 3****TYPE 4**

ORDER NR.:	DESCRIPTION:		A	B	C	D	E	TYPE
01060	R10	standard		2,5	148		274	4
RN20-28am	RN20/12	standard	20	3	175	255	290	1
R20-28m	R20, RN20	standard	20	3	205	324	359	1
R20-28ms	R20, RN20		20	4	205	324	359	1-1
R20-28mt	R20, RN20		20	2	205	324	359	1-2
R27-28am	R30/15, RN30/15, AR30/15	standard	25	4	191	325	365	1
RN30-28m	RN30, AR30	standard	25	4	227	384	424	1
RN30-28mt	RN30, AR30		25	3	227	384	424	1-2
R40-28am	R40/20, AR40/20	standard	30	4	210	360	400	1
R40-28m	R40, AR40	standard	30	4	242	448	488	1
R40-28ms	R40, AR40		30	5	242	448	488	1-1
R40-28mt	R40, AR40		30	3	242	448	488	1-2
R60-28am	R60/30, AR60/30	standard	35	4	240	393	451	1
R60-28ams	R60/30, AR60/30		35	5	240	393	451	1-1
R60-28m	R60, AR60	standard	35	5	300	522	592	1
44R60	R60, AR60		35	6	290	522	592	2
R60-28mt	R60, AR60		35	4	300	522	592	1-2
AR80-28m	AR80	standard	35	5	300	568	640	1
44AR80	AR80		35	5	290	568	640	2
RN100-28bm	RN100/40, AR80/40	standard	35	4	215	529	592	1
RN100-28bms	RN100/40, AR80/40		35	5	215	529	592	1-1
RN100-28am	RN100/60	standard	35	5	270	575.5	647	1
RN100-28ams	RN100/60		35	6	270	575.5	647	1-1
RN100-28m	RN100	standard	35	5	361	626	697	1
44RN100	RN100		35	6	363	626	697	2
RN100-28mt	RN100		35	4	363	626	697	1-2
W140-28m	W140Q	standard	35	6	361	715	785	1
R150-28am	R150/70	standard	25/40	5	295	608	707	1
R150-28m	R150	standard	25/40	6	386	718	817	1
R150-28bm	R150/200	standard	25/40	6	386	808	907	1
44R150	R150		25/40	6	375	710	809	2
44R150.1	R150		25/40	6	375	710	809	2-1
44R150b	R150/200		25/40	6	386	808	907	2
14RN20a	RN20/12		20	4	184	259	294.5	3
14R20	R20, RN20		20	4	210	326.5	362	3
14R30a	R30/15, RN30/15, AR30/15		25	4	194	327	367	3
14RN30	RN30, AR30		25	4	232	384	424	3
14R40a	R40/20, AR40/20		30	4	220	362	414	3
14R40	R40, AR40		30	4	250	450	500	3
14R60a	R60/30, AR60/30		35	4	250	395	455	3
14R60	R60, AR60		35	5	308	529	594	3
14AR80	AR80		35	5	338	572	644	3
14RN100b	RN100/40, AR80/40		35	4	222	525	593	3
14RN100a	RN100/60		35	5	279	580	640	3
14RN100	RN100		35	5	373	629	685	3
14R150a	R150/70		25/40	5	308	610	715	3
14R150	R150		25/40	5	396	725	825	3
14R150b	R150/200		25/40	5	396	808	913	3

ÆLDRE MODELLER

PREVIOUS MODELS

FRÜHERE MODELLE

ORDER NR.:	DESCRIPTION:		A	B	C	D	E	TYPE
R20-28am	R20/12		20	3	175	310	346	1
UR27-28m	R30	standard	25	4	212	390	430	1
14UR30	R30		25	4	218	392	437	3
R100-28m	R100	standard	35	5	326	568	638	1
R100-28am	R100/40	standard	35	4	215	444	502	1
R100-28ams	R100/40		35	5	215	444	502	1-1
44R100	R100		35	6	315	560	630	2
R100-28mt	R100		35	4	326	568	638	1-2
14R20a	R20/12		20	4	184	315	350.5	3
14R100a	R100/40		35	4	222	444	505	3
14R100	R100		35	5	338	570	644	3

